


TDD-DTM750

75 '' Digital Signage Closed Frame PCAP Touch Monitors

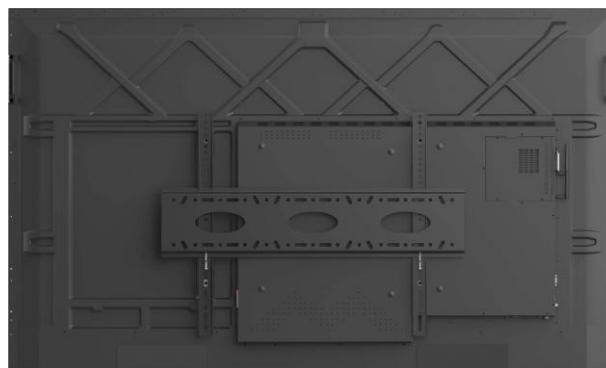

Overview

The **TDD Touch Monitors** include **Standard, Industrial (Open Frame Bezel-free | Rear Mount, Panel Mount, Closed Frame), Outdoor, Waterproof, Stainless Steel, Marine, Curved, Desktop POS, Commercial Displays, Medical** and **Custom** types, delivers an industrial, reliable and cost-effective solution with outstanding image clarity & accurate touch response for OEMs & systems integrators. 7-98" sizes with rugged bezel, flat structure, high durability and versatility for Kiosks applications from Self-service, Automated Parking, Industrial Automation, Outdoor Control, Healthcare to Gaming.

Features

- Touch thru glass enabled with PCAP supports thickness up to 5mm
- Desktop or wall mount design with **Light Aluminum Frame & Steel Back**
- IP65 (front) for water and dust protection, flexible mounting in any table, kiosk, or cabinet design

Specifications

Panel

Diagonal Size 75"(16:9), 190.5cm, Active matrix TFT LCD (LED)

Active Area (mm) 1649.66 mm x 927.936 mm

Resolution **3840 x 2160**

Viewing Angle Horizontal: 89° or 178° total / Vertical: 89° or 178° total

Number of Colors 16.7 million

Brightness (typical) 350 nits

Response Time-total 8 (Typ.)(G to G) ms

Contrast Ratio 1200:1

Input Video Frequency Horizontal: 30 - 60 KHz / Vertical: 50 - 75 Hz

Touch

Touch Technology PCAP (Projected Capacitive) - 10 Touch Capacity

Surface Treatment Water, Dust & Vandal proof; **Optional:** Anti-glare, Anti-fingerprint, Anti-smudge, Anti-bacterial

Supported OS Windows / Android / Linux / Mac

Interfaces / Connectors / Controls

Video Interfaces VGA x1 / HDMI x1 / DVI x1 (opt.) / Display Port x1 (opt.) / USB x1 for Touch; HDCP: Yes

Connectors & Controls Audio Mini jack x1 / DC x1; 5 OSD buttons

Power

Supply / Consumption: 100-240 VAC / 12VDC +/- 5%; 280W typical, 1.5W sleep, 0.5W off

Mechanical

Product Dimensions: 1715.7 x 996.3 x 93.1mm / Weight (Unpacked/Packed): 52/65 kg
Box Dimensions: 1850 x 230 x 1140mm / VESA Mounting: 700 x 400mm(4*M8)

Environmental

Operating / Storage Temperature: -10°C to 50°C / -20°C to 60°C

Accessories

Power adapter / cable, HDMI / VGA / Touch USB cable, wall mount brackets w/screws (opt.)

Others

MTBF / Warranty / Enclosure Color: 50,000 hours demonstrated / 1-year / black | silver
Ready for Use: 24/7, **Wooden Case Pack:** N.W./G.W/Sizes: 52/115.4kg/2240x1200x430mm

* TDD (www.tddtouch.com, sales@tddtouch.com) reserves the right to change specifications without prior notice.