



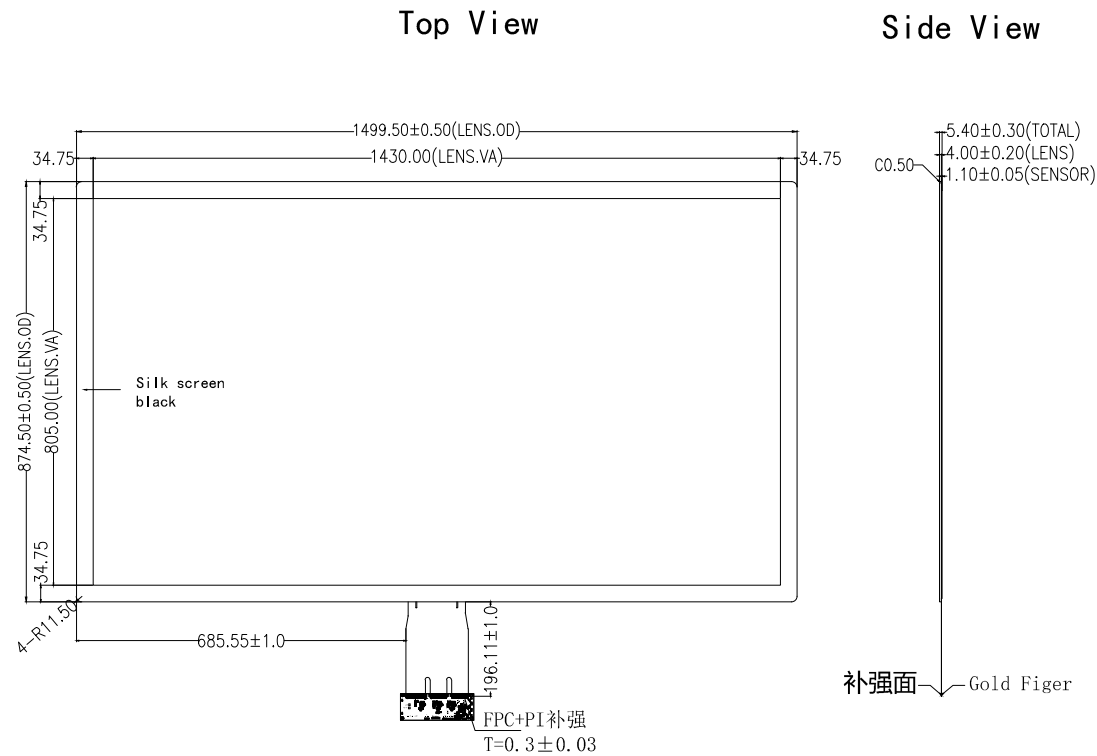


规格参数 Spec.				
1	产品结构类型 Structure	Glass+Glass		
2	COVER LENS钢化类型 Strengthening	物理钢化		
3	COVER LENS表面硬度 Surface Hardness	>6H		
4	无油墨处透光率 Transmission	>=83%		
5	工作温度 Operation temperature	-10℃ ~ 60℃		
6	储存温度 Storage temperature	-20℃ ~ 70℃		
所有产品物料必须满足ROHS和无卤素要求				
All materials comply with RoHS & Halogen free requirement				
接口类型 Interface		☐ IIC ☒ USB ☐ UART		
触控IC型号 Touch IC		ILI2325*3+M2V*1	通道数 Channels	TX 72 RX 128
供电电压 VDD		☐ 3.3V ☒ 5V	通讯电压 IIC Voltage	☐ 3.3V ☐ 1.8V
SDA, SCL主板上是否有上拉电阻 Resistance on SDA, SCL main-board		☐ 是Yes ☐ 否No		

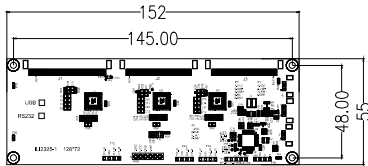

比例4: 1

P1	
Pin NO.	Pin Name
1	VCC
2	USB-
3	USB+
4	GND



			Product Name: 65" Projected capacitive touch screen	
Material	Weight	Unit		
Glass +Glass		mm		
Sheet 1 of 1			Rev 1.0	