


Outdoor Touch Monitors AD Board Change Steps




Note: Hold the socket with your hands to unplug it, and try not to pull it out by the wire. You only need to move the three wires in the picture to determine whether it is a problem with the driver board.

1. Open the touch monitors as following picture

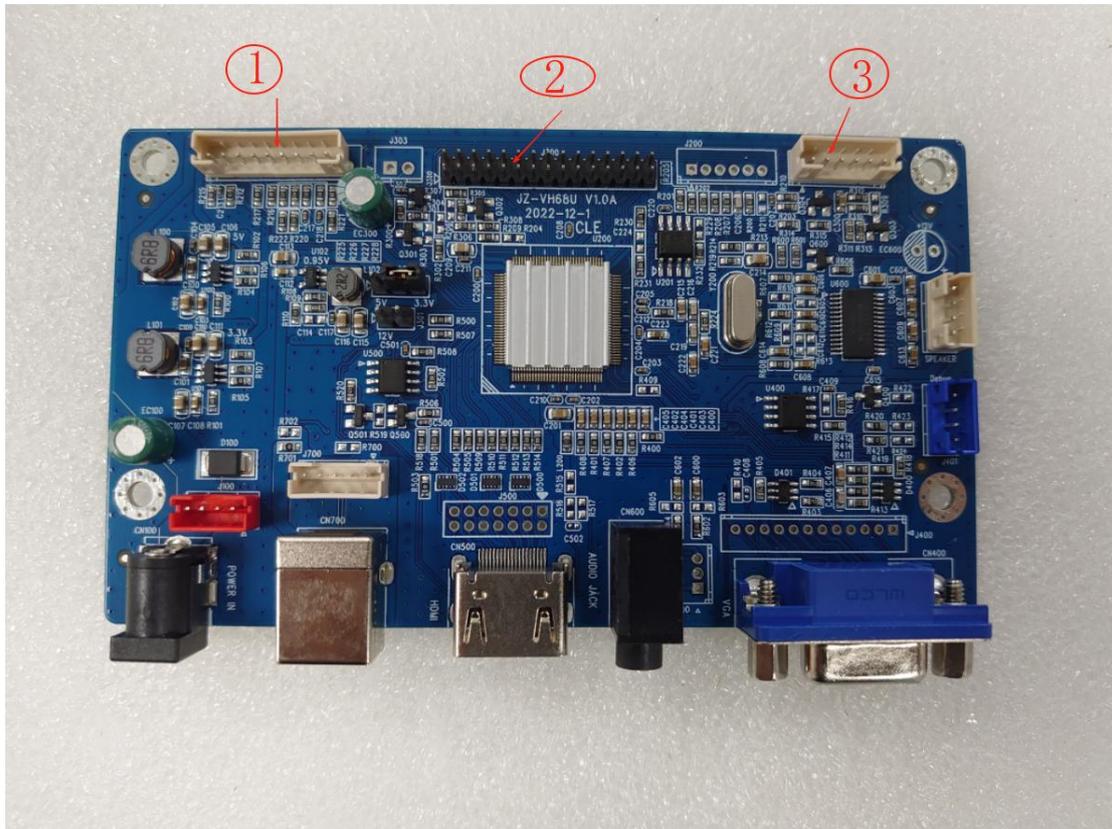

2. Remove the original motherboard, replace it with a new one and connect the 3 wires in sequence, then power on.

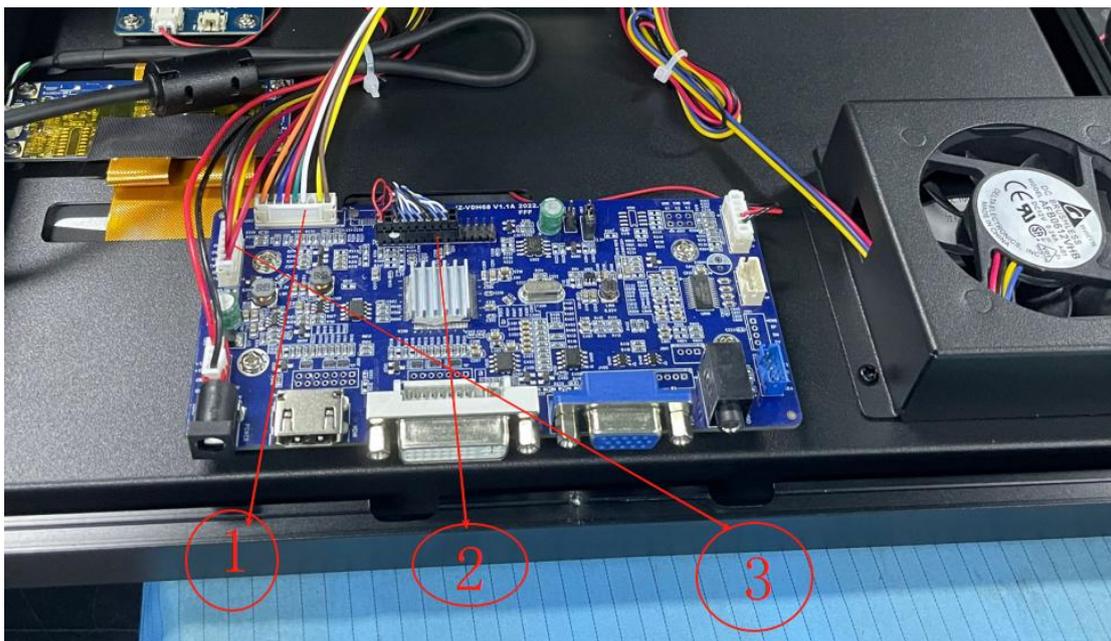

* TDD (www.tddtouch.com , sales@tddtouch.com) reserves the right to change specifications without prior notice.