



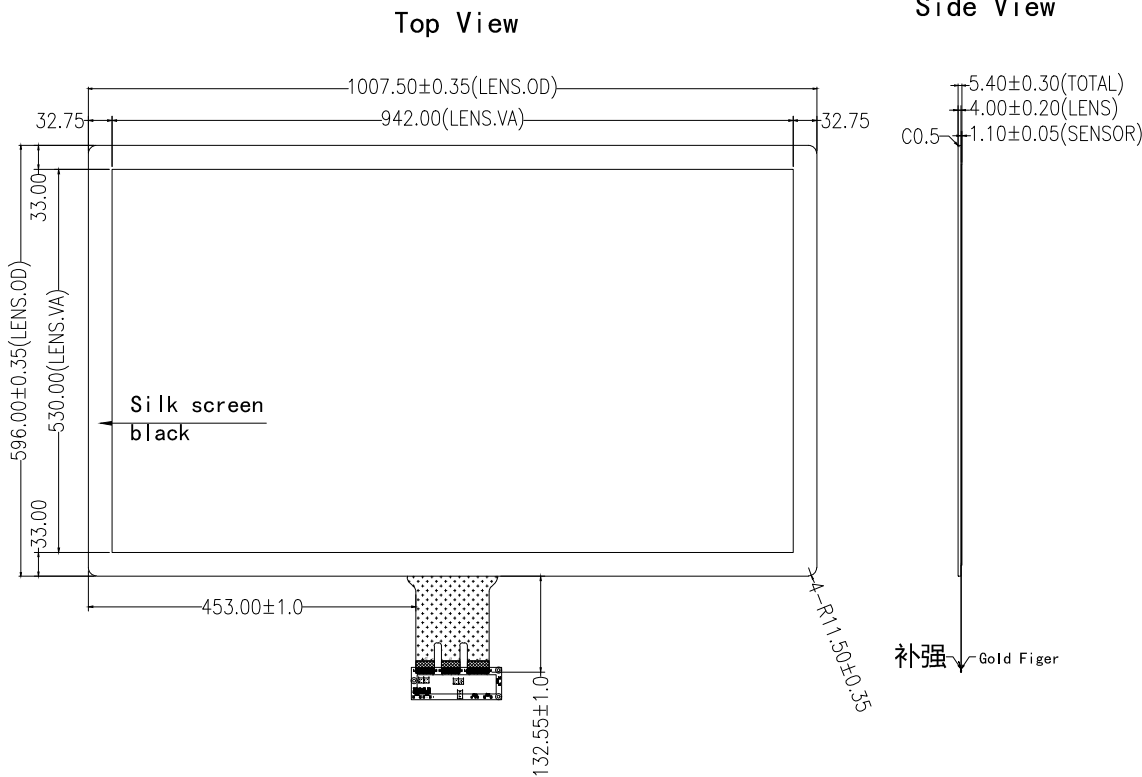

规格参数 Spec.					
1	产品结构类型 Structure			Glass+Glass	
2	COVER LENS钢化类型 Strengthening			物理钢化	
3	COVER LENS表面硬度 Surface Hardness			≥6H	
4	无油墨处透光率 Transmission			≥86%	
5	工作温度 Operation temperature			-10℃ ~ 60℃	
6	储存温度 Storage temperature			-20℃ ~ 70℃	
所有产品物料必须满足ROHS和无卤素要求					
All materials comply with RoHS & Halogen free requirement					
接口类型 Interface		☐ IIC	☒ USB		☐ UART
触控IC型号 Touch IC		ILI2322	通道数 Channels	TX 50	RX 90
供电电压 VDD		☐ 3.3V ☒ 5V	通讯电压 IIC Voltage	☐ 3.3V	☐ 1.8V
SDA, SCL主板上是否有上拉电阻 Resistance on SDA, SCL main-board			☐ 是 Yes ☐ 否 No		

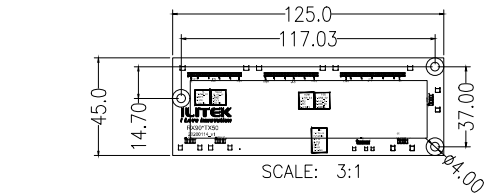

USB

Pin NO.	Pin Name
1	VDD
2	D-
3	D+
4	GND

J1

Pin NO.	Pin Name
1	GND
2	GR
3-5	NC
6-55	TX50-TX1
56-58	NC
59	GR
60	GND

J2

Pin NO.	Pin Name
1	GND
2	GR
3	NC
4-48	RX1-RX45
49	GR
50	GND

J3

Pin NO.	Pin Name
1	GND
2	GR
3-47	RX46-RX90
48	NC
49	GR
50	GND

			Product Name: 43" Projected capacitive touch screen	
Material	Weight	Unit	Product No. TDD - PCT - M430	
Glass +Glass		mm	Drawing No.	Rev 1.0
Sheet 1 of 1				