




Top View

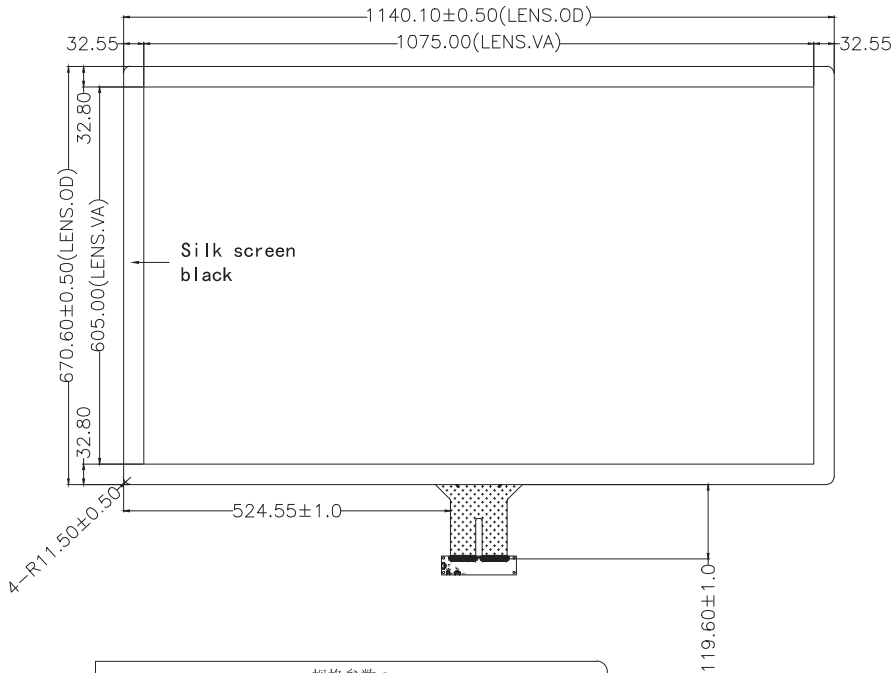

Side View

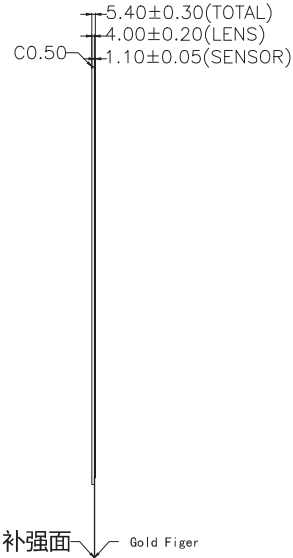


Bottom View

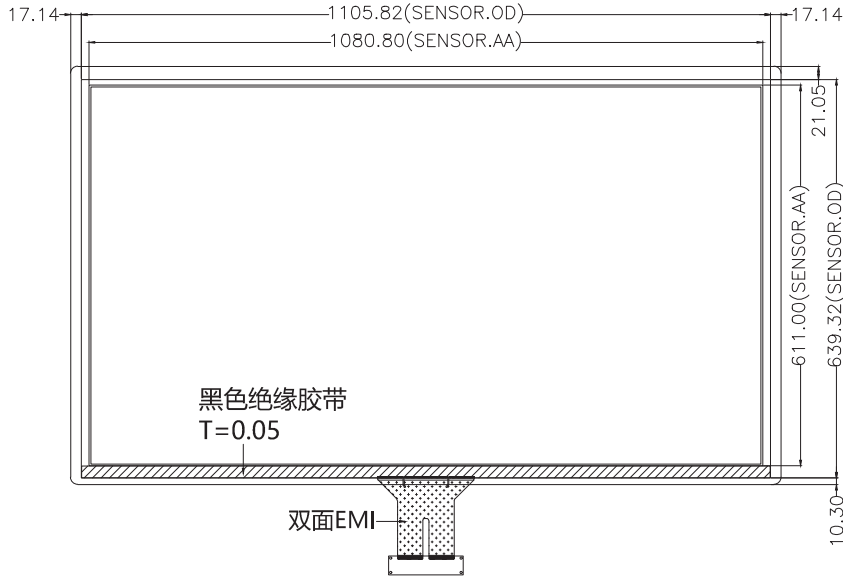

规格参数 Spec.					
1	产品结构类型 Structure		Glass+Glass		
2	COVER LENS钢化类型 Strengthening		物理钢化		
3	COVER LENS表面硬度 Surface Hardness		>6H		
4	无油墨处透光率 Transmission		>=86%		
5	工作温度 Operation temperature		-10℃ ~ 60℃		
6	储存温度 Storage temperature		-20℃ ~ 70℃		
所有产品物料必须满足ROHS和无卤素要求					
All materials comply with RoHS & Halogen free requirement					
接口类型 Interface	☐ IIC	☒ USB	☐ UART		
触控IC型号 Touch IC	IL12315	通道数 Channels	TX	54	RX 96
供电电压 VDD	☐ 3.3V	☒ 5V	通讯电压 IIC Voltage	☐ 3.3V	☐ 1.8V
SDA, SCL主板上是否有上拉电阻 Resistance on SDA, SCL main-board			☐ 是 Yes ☐ 否 No		

USB

Pin NO.	Pin Name
1	VBUS
2	D-
3	D+
4	GND



SCALE: 3:1

			Product Name: 49" Projected capacitive touch screen	
Material	Weight	Unit	Product No. TDD - PCT - L490	
Glass +Glass		mm	Drawing No.	
Sheet 1 of 1			Rev 1.0	