





TOP VIEW

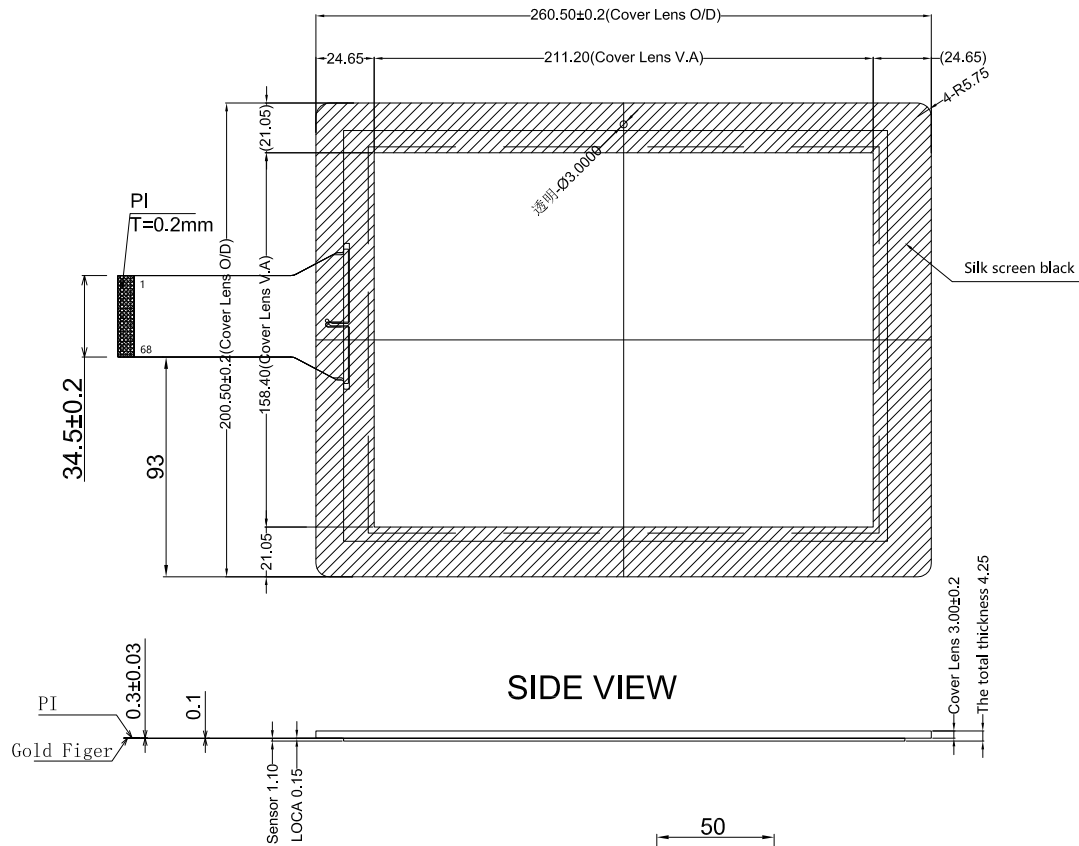

BOTTOM VIEW

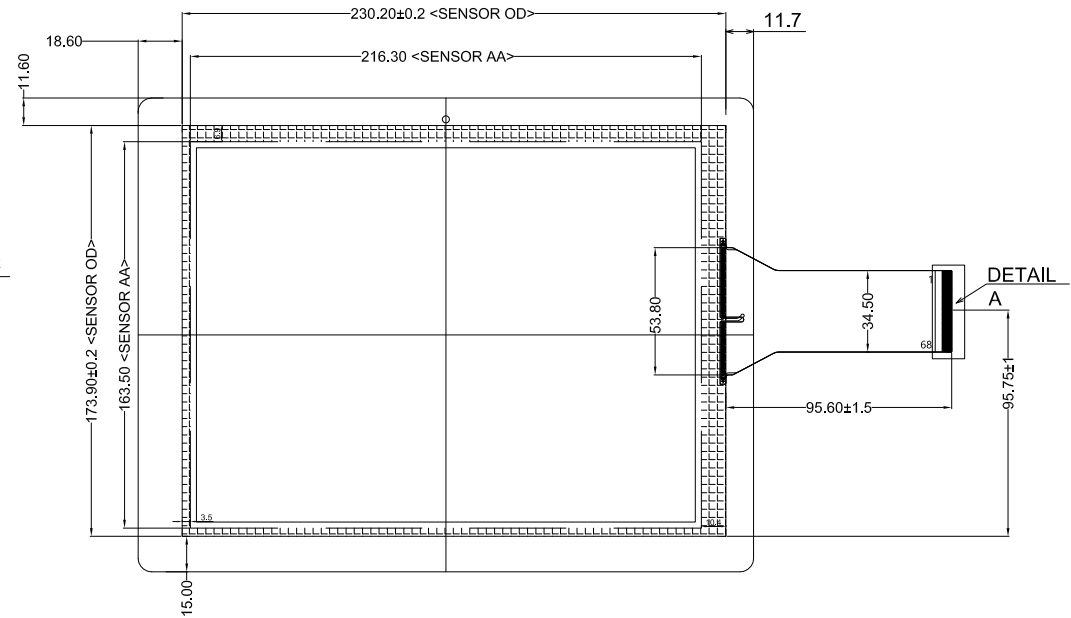

SIDE VIEW

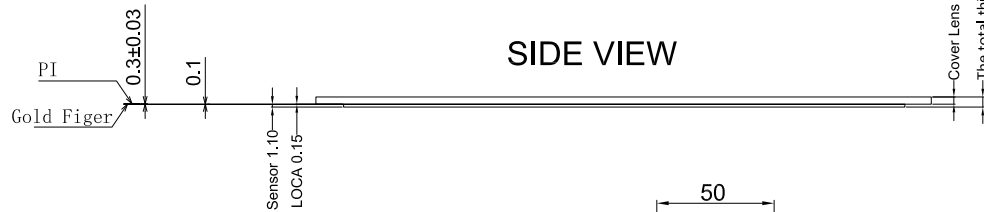

ILITEK2511 C2 P1 V1

USB	
1	VDD/5V
2	D-
3	D+
4	GND

IIC	
1	VCC
2	I2C_SDA
3	I2C_SCL
4	I2C_INT
5	GND
6	GND

Technical parameters:

1. COVER LENS To strengthen the glass;
2. FPC interface cable USB Interface;
3. IC (ILI2511) ILITEK2511 C2 P1 V1;
4. Working voltage:5.0V;
5. The resolution: Automatic identification;
6. For the surface hardness7H;
7. Light Transmission more than 86%;
8. Not specified tolerances $\pm 0.2\text{mm}$;
9. Products comply with RoHS standard.

Touch Panel Structure		
TOP		
-----Cover		3.0mm
-----UV		0.15mm
-----ITO	}	1.1mm
-----Sensor glass		
-----ITO		
BOTTOM		YTG-G104676-S1F1

			Product Name: 10.4 " Projected capacitive touch screen
Material	Weight	Unit	Product No. TDD - PCT - S104
Glass +Glass		mm	Drawing No.
Sheet 1 of 1			