


# TDD-OFD-860H

## 86" **Outdoor** Open Frame Displays

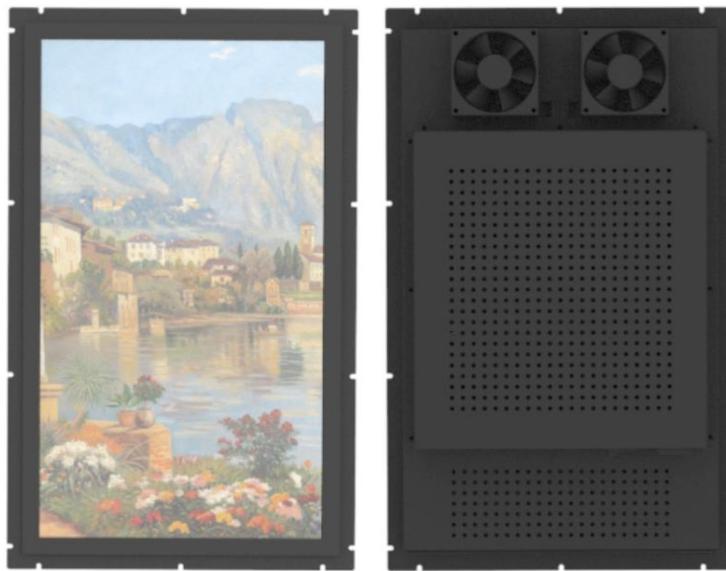

### Overview

The **TDD Touch Monitors** include **Standard, Industrial (Open Frame Bezel-free | Rear Mount, Panel Mount, Closed Frame), Outdoor, Waterproof, Stainless Steel, Marine, Curved, Desktop POS, Commercial Displays, Medical and Custom** types, delivers an industrial, reliable and cost-effective solution with outstanding image clarity & accurate touch response for OEMs & systems integrators. 7-98" sizes with rugged bezel, flat structure, high durability and versatility for Kiosks applications from Self-service, Automated Parking, Industrial Automation, Outdoor Control, Healthcare to Gaming.

### Features

- **5mm ultra white** tempered glass with anti-mist **Optical Bonding** (Wacker gel), optional with PCAP touch & AG
- Embedded design with **wide temperature TFT panel** rated up to 105 °C, **auto-dimmer, low noise smart fans**
- IP65 (front) for water and **Dust Protection**, with mounting holes on all four sides for flexible mounting

### Specifications

#### Panel

Diagonal Size 86"(16:9), 218.44cm, Active matrix TFT LCD (LED)

Active Area (mm) 1895.04 mm x 1065.96 mm

Resolution 3840 x 2160

Viewing Angle Horizontal: 89° or 178° total / Vertical: 89° or 178° total

Number of Colors 16.7 million

Brightness (typical) **2500 nits**

Response Time-total 13 (Typ.)(G to G) ms

Contrast Ratio 1200:1

Input Video Frequency Horizontal: 30 - 60 KHz / Vertical: 50 - 75 Hz

**Touch** **N/A**

#### Interfaces / Connectors / Controls

Video Interfaces HDMI x1 / VGA x1 (opt.) / Display Port x1 (opt.) / USB x1 for Touch; HDCP: Yes

Connectors & Controls Audio Mini jack x1 / DC x1

**Power** Supply / Consumption: 90-264 VAC +/- 5%; 480W typical, 1.5W sleep, 0.5W off

**Mechanical** Product Dimensions: TBD / Weight (Unpacked / Packed): TBD  
**(Subject to change)** Box Dimensions: TBD / Mounting: with mounting holes for flush mounting

**Environmental** Operating / Storage Temperature: **-20°C to 70°C** / -30°C to 80°C

**Accessories** Power adapter / cable, HDMI / VGA / Touch USB cable

**Others** MTBF / Warranty / Enclosure Color: 50,000 hours demonstrated / 1-year / black  
 Ready for Use: 24/7, **panel surface treatment: Haze 3%**

\* TDD ([www.tddtouch.com](http://www.tddtouch.com), [sales@tddtouch.com](mailto:sales@tddtouch.com)) reserves the right to change specifications without prior notice.